


TECHN. DATEN (TECHNICAL DATA):

NENNDRUCK (NOMINAL PRESSURE) P_N 70 MPa (700bar)
 PRÜFDRUCK (TEST PRESSURE) P_p 84 MPa (840bar)
 GEWICHT (WEIGHT) 19,6 kg


(INKL. 0,3m SCHLÄUCHE U. KUPPLUNGEN; INCL. 0,3m HOSES AND COUPLINGS)
 ÖLBEDARF (REQUIRED OIL VOLUME) 0,3 l

Schneidklasse (CUTTING CLASS)

EN 13204 CC200K-19,6 (1K-2K-3K-4K-5K)
 NFPA 1936 A8-B9-C8-D9-E9

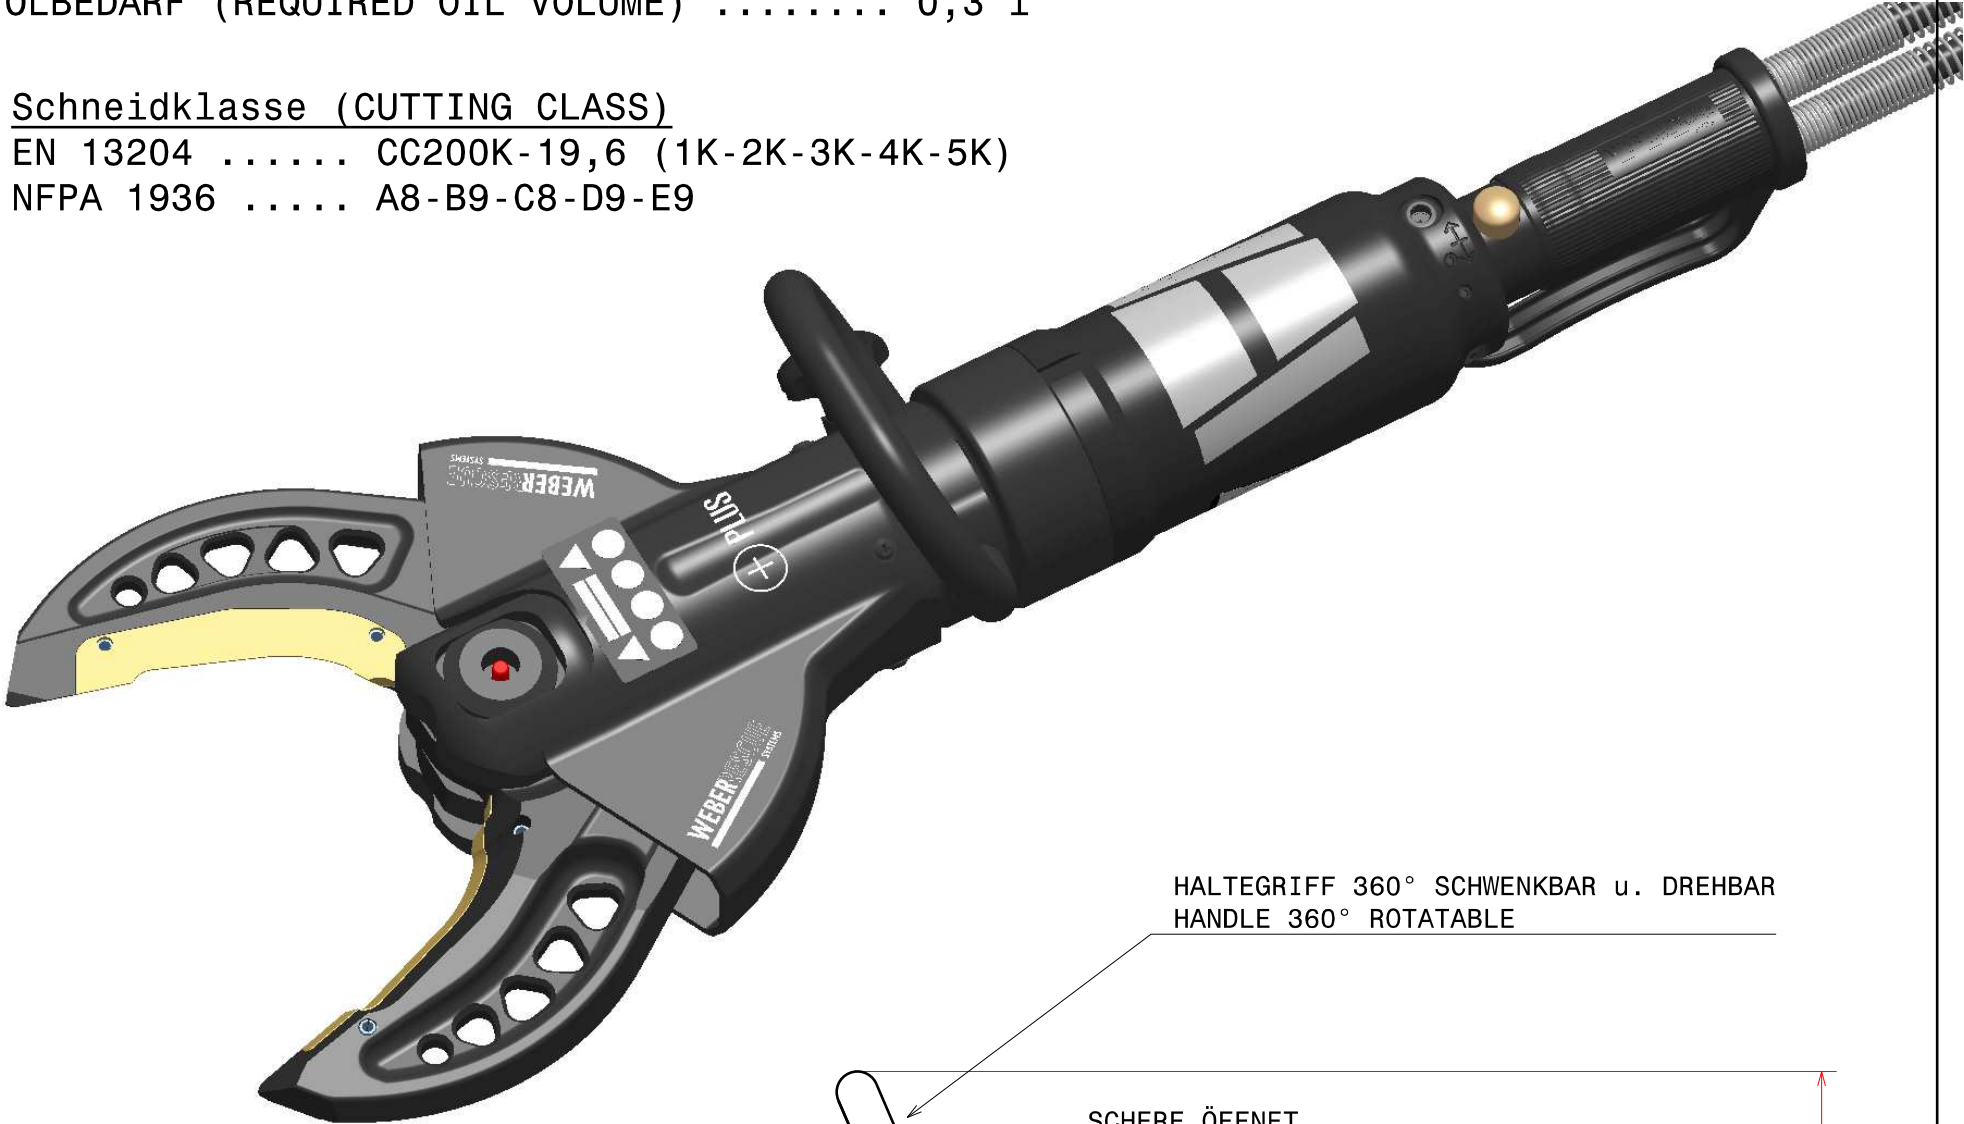


HALTEGRIFF 360° SCHWENKBAR u. DREHBAR
 HANDLE 360° ROTATABLE

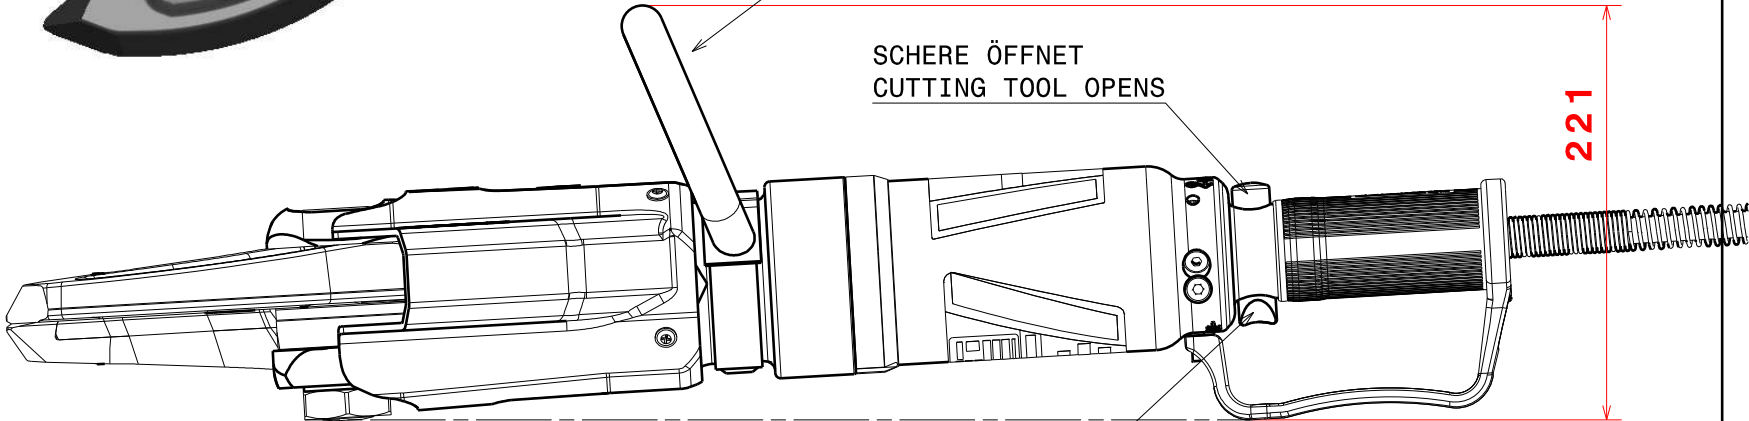

SCHERE ÖFFNET
 CUTTING TOOL OPENS

SCHERE SCHLIESST
 CUTTING TOOL CLOSSES

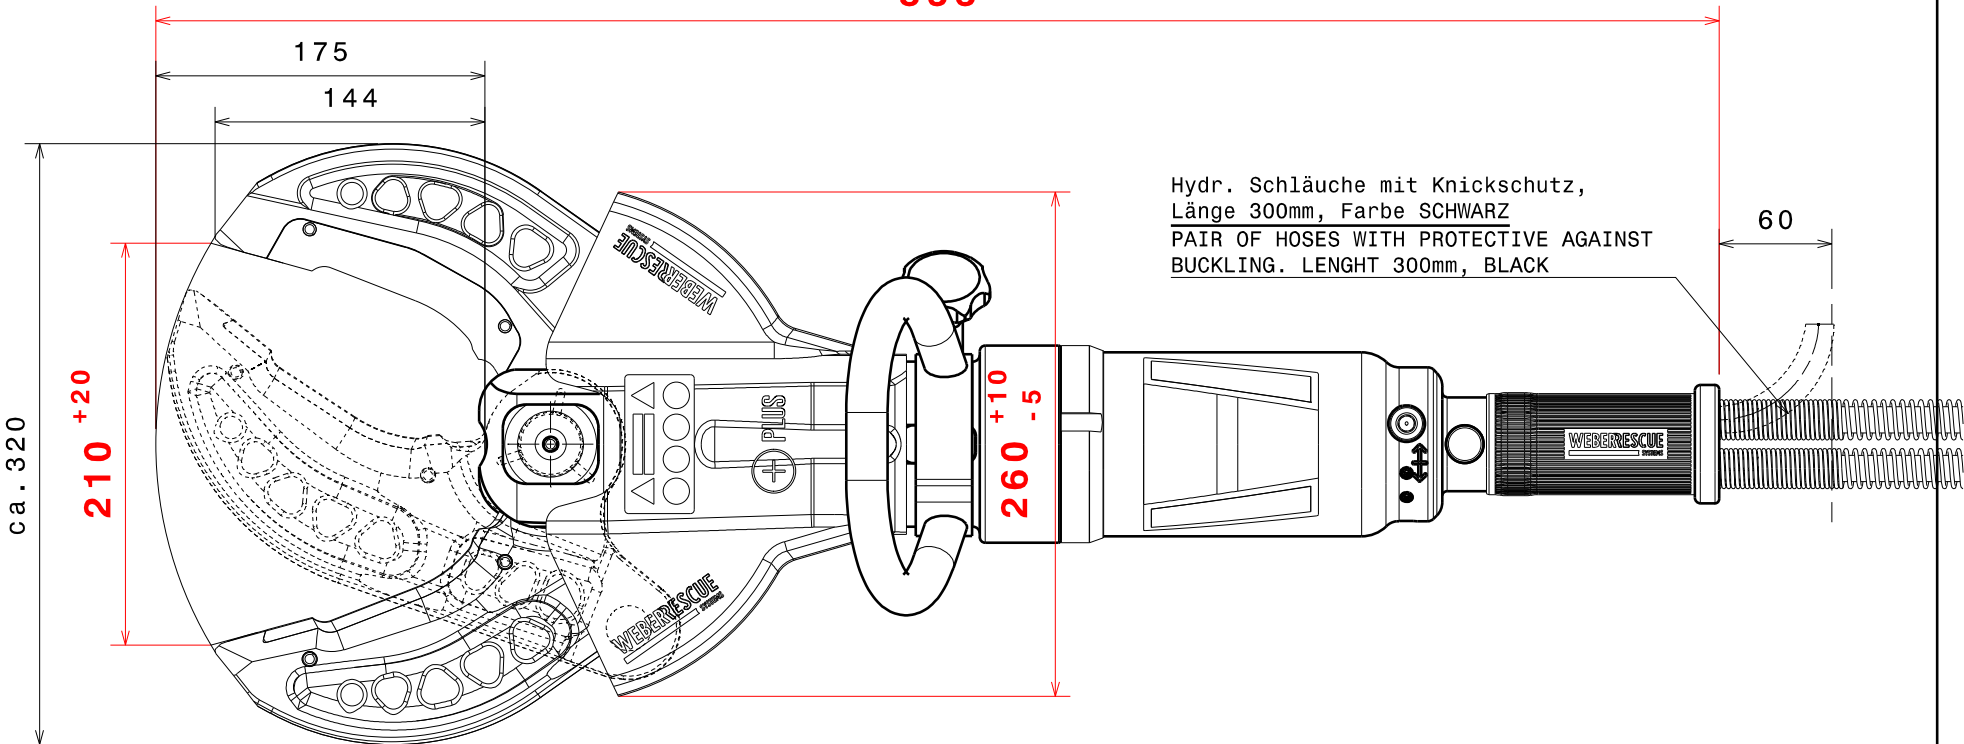

Hydr. Schläuche mit Knickschutz,
 Länge 300mm, Farbe SCHWARZ
 PAIR OF HOSES WITH PROTECTIVE AGAINST
 BUCKLING. LENGHT 300mm, BLACK

TOLERANZEN (TOLERANCES)	LAENGENMASS (LENGHT)mm	...50	50...250	250...1000	1000...	WINKELMASS (ANGLE)	...180°
GEWICHT (WEIGHT) ±2%	TOLERANZ (TOLERANCE)mm	±1,5	± 2,0	± 3,0	± 5,0	TOLERANZ (TOLERANCE)	±10°