

TECHN. DATEN (TECHNICAL DATA):


NENNDRUCK (NOMINAL PRESSURE) P_N 70 MPa (700bar)
PRÜFDRUCK (TEST PRESSURE) P_p 84 MPa (840bar)
GEWICHT (WEIGHT) 23,5 kg (INCL. AKKU)
BETRIEBSSPANNUNG (OPERATING VOLTAGE).....28 VDC

Schneidklasse (CUTTING CLASS)


DIN 14751/4..... C200-K-E-I
EN 13204 (IN ANLEHNUNG/ ACCORDING TO). CC200K-23,5 (1K-2K-3K-4K-5K)
NFPA 1936 A8-B9-C8-D9-E9



HALTEGRIFF 360° SCHWENKBAR
HANDLE 360° ROTATABLE

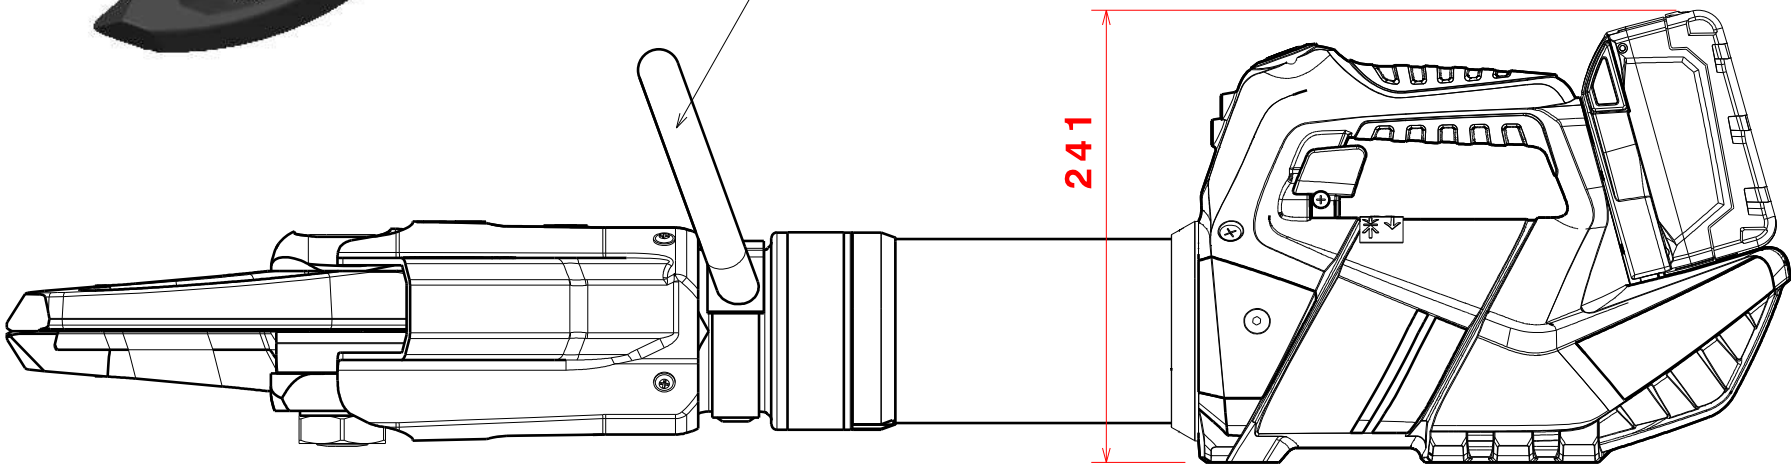

241

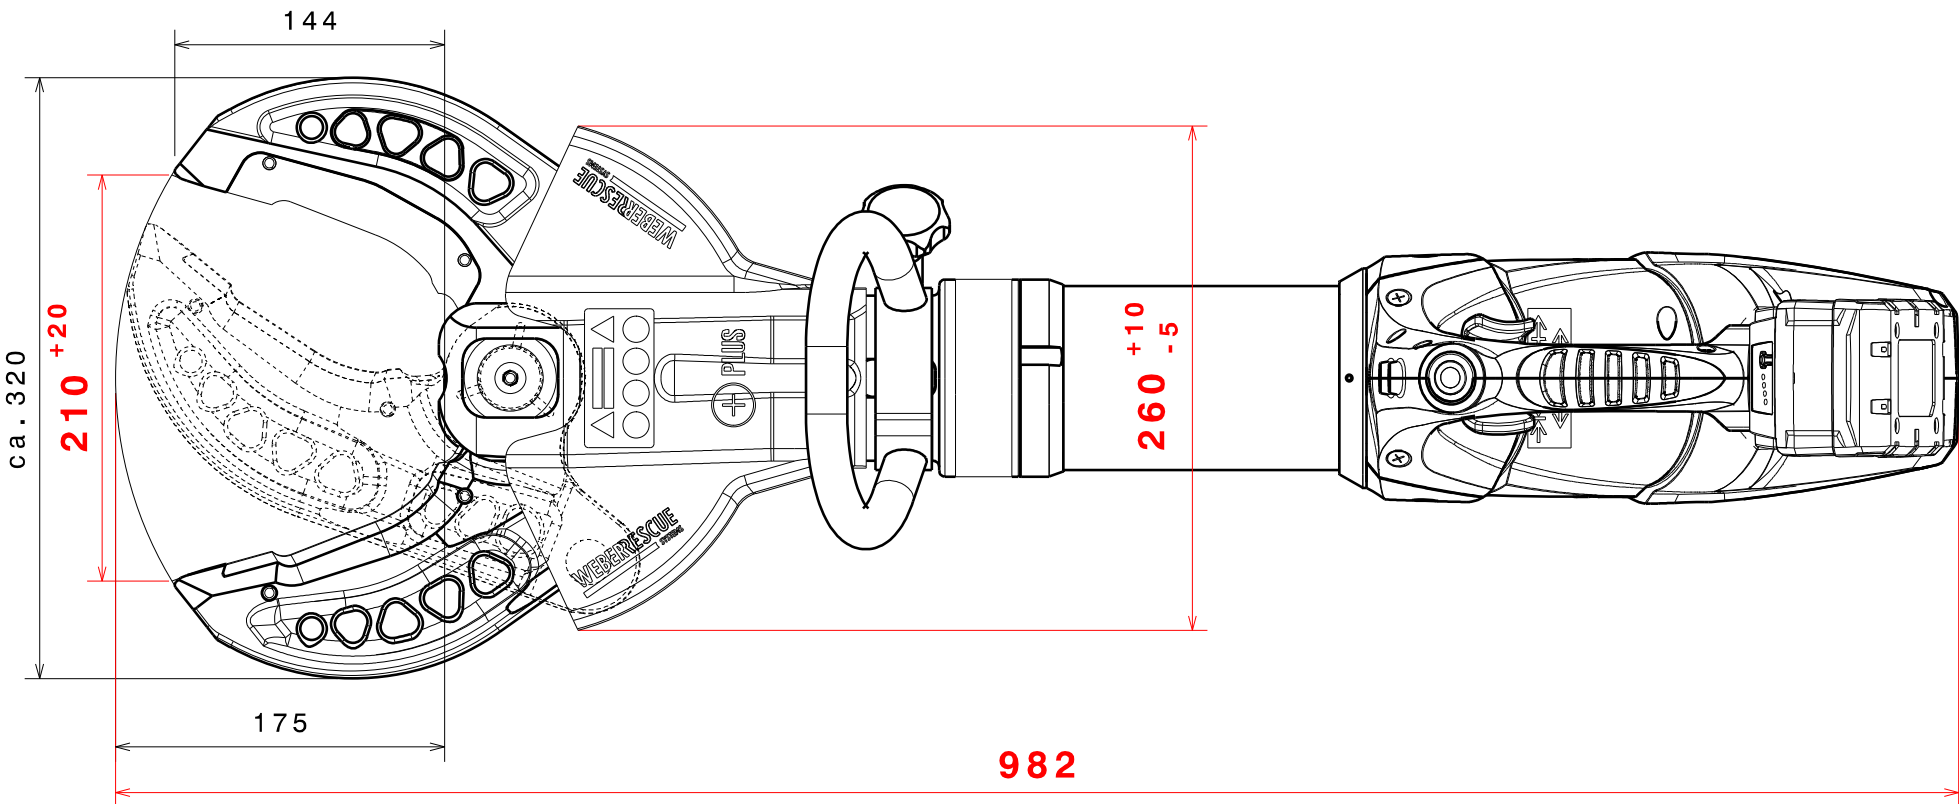

ca. 320

210 +20

144

175

260 +10
-5

982

GEPR. JSC
CHECK.

GEZ. KST
DRAW.

DAT. 12.07.17
DATE

GEAEND. MODIF.
MOD.

AEND.-DATUM
MOD.-DATE

AEND.-NR.
MOD.-NO.

REVISION
REVISION

TOLERANZEN (TOLERANCES)	LAENGENMASS (LENGHT)mm	...50	50...250	250...1000	1000...	WINKELMASS (ANGLE)	...180°
GEWICHT (WEIGHT) ±2%	TOLERANZ (TOLERANCE)mm	±1,5	± 2,0	± 3,0	± 5,0	TOLERANZ (TOLERANCE)	±10°